

A SMARTER WAY TO HANDLE RETAIL DELIVERY

Walkie pallet truck with direct-store delivery package

From trailer lift gates to narrow store aisles and the uneven parking lots in between, delivery drivers have their work cut out for them. The direct-store delivery (DSD) package for the Yale® MPB045VH is purpose-built to equip personnel for success whether they are moving product to mom-and-pop or big box stores.



STAY SECURELY POSITIONED ON THE LIFTGATE

With dual-side controls and full functionality in the upright position, the DSD handle allows operators to stand comfortably beside the truck on the liftgate, essential for navigating tight spaces with sharp turns.

ACCOMMODATE A RANGE OF PALLET TYPES

A moveable load backrest with quick latch and pivot arms enables operators to efficiently handle the variety of pallet types common in retail delivery with a single fork configuration.

MAINTAIN STABILITY ON CHALLENGING TERRAIN

The 2-inch ratcheting and locking retention strap helps keep a variety of load types and sizes secure and stable over door jams, curbs and rough, broken pavement.

KEEP THE PALLET TRUCK CHARGED ALL DAY


The zero-maintenance, quick-charging lithium-ion battery can be recharged anywhere, anytime through a standard 120V outlet — even in the tractor-trailer between deliveries.

NAVIGATE OTHER TIGHT, DYNAMIC ENVIRONMENTS

With a lithium-ion battery pack that's 25% shorter than a lead-acid one, the smaller truck footprint makes it easy to maneuver through cramped aisles and trailers, while the creep speed function provides maximum precision and control.

The Yale DSD walkie has an operational footprint 43% smaller than leading competitors, helping maneuver in tight direct-to-store environments.

Deliver with confidence.
Take a closer look at the
DSD walkie →

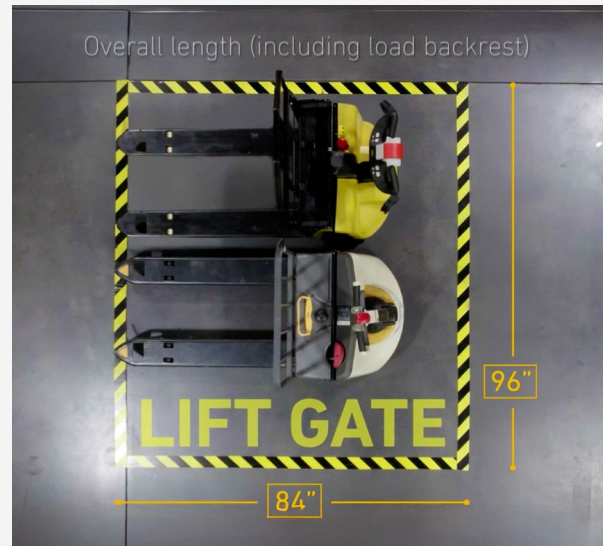

GENERAL SPECIFICATIONS				
GENERAL	Manufacturer		Yale	
	Model designation		MPB045-VG	
	Power type		24V	
	Operator type		Pedestrian	
	Rated capacity		lb. (kg)	4500 (2041)
	Fork length	Actual	in. (mm)	34.1 (866)
	Fork overall width		in. (mm)	24.4 (620)
	Individual fork width		in. (mm)	7 (172)
DIMENSIONS	Wheel base	Raised	in. (mm)	38.5 (979)
		Lowered	in. (mm)	41.7 (1060)
	Overall length*		in. (mm)	54.3 (1380)
	Chassis length		in. (mm)	20.2 (514)
	Outside turning radius (bumper)		in. (mm)	46.5 (1180)
	Grade clearance	Chassis	%	67
		Center of wheel base	%	48
		Forks	%	74
	Battery compartment		in. (mm)	26.5 x 6.0 x OPEN
				(672 x 153 x OPEN)
PREF	Maximum travel speed	No load / Rated load	mph (kph)	3.7 / 3.7 (6.0 / 6.0)
	Traction motor control method	Type	AC transistor	
	Service brake	Type	Electro-mechanical	
WT.	Truck weight w/ battery (approximate)	No load / Rated load	lb. (kg)	716 / 5216 (324 / 2365)
BATTERY	Type		Li-ion	
	Ampere hours		ah	56
	Weight		lb. (kg)	92 (42)

*Multiple fork configurations available

Trucks may be shown with optional equipment. Truck performance may be affected by the condition of the vehicle, how it is equipped and the application. Specifications are subject to change without notice. Consult your Yale® Dealer if any of the information shown is critical to your application.